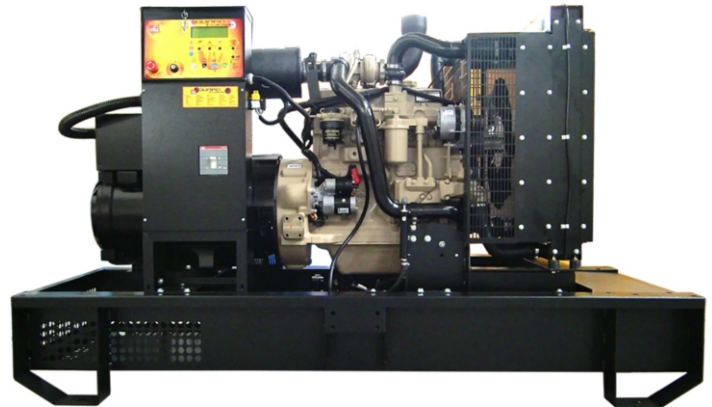


130.0 kVA FPT IVECO GENERATOR

FEATURES & BENEFITS

- Maximum 143.0 kVA, 400 V, 1500 RPM
- Industrial brushless alternator with AVR
- Steel baseframe, retention basin & fuel tank with sensor
- 360 litre tank for 15 hrs @ 75% Load
- Test report, manuals and electrical drawings supplied
- Modular design, open and silent version available
- Industrial silencer and coupling flange
- Electrical panel mounted on board the unit with digital control device installed in metal box
- Compact for easy handling and use
- World wide after sales service and technical support


ABB


GENERAL DATA	
Model:	F130GO
Continuous power (PRP):	130.0 kVA
Continuous power (PRP):	104.0 kW
Stand-by power (LTP):	143.0 kVA
Stand-by power (LTP):	114.4 kW
Power factor:	0.8
Frequency (Hz):	50 Hz
Voltage (V):	400 V
Width:	1140 mm
Length:	3000 mm
Height:	1770 mm
Weight:	1740 kgs
Tank Capacity:	360 l
dBa @ 7m:	N/A

ALTERNATOR	
Alternator brand:	STAMFORD
Alternator model:	UCI274E
L.T.P. Power:	145.0 kVA
P.R.P. Power:	132.0 kVA
Connection:	Series star
Phases:	Three phases with neutral
Terminal Number:	12
IP Protection:	23
Alternate Alternator:	STAMFORD / UCI274E

ENGINE DATA	
Brand:	FPT IVECO
Model:	N67TM2A
Cylinders:	6
RPM:	1500
Cubic Capacity:	6.70
Air Intake:	Turbocharged
Standard Voltage:	12
SAE:	3-11 1/2
BMEP:	1411
Cooling:	Water
Flywheel P.R.P. Power:	114.0 kW
Flywheel Stand-by Power:	125.0 kW
Oil Qty:	17.2 l
Antifreeze Qty:	10.5 l
Heat from Radiator:	63.0 kW
Heat from Exhaust:	86.5 kW
Exhaust Temperature:	468 °C
Cooling Airflow:	192.00 m³/min
Combustion Airflow:	9.30 m³/min
Exhaust Airflow:	24.30 m³/min
TA Luft / TA Luft 2:	Not available / Not available
Stage:	Stage 2

FUEL CONSUMPTION	
Fuel Cons. at 110%:	32.0 l/h
Fuel Cons. at 100%:	29.3 l/h
Fuel Cons. at 75%:	22.6 l/h
Fuel Cons. at 50%:	15.8 l/h
Fuel Cons. at 25%:	0.0 l/h

* Specs subject to change without prior notice.

* Measurements based on ISO8528-1 Standards

* Picture may vary from actual product.